CC-XX

Tolerance unspecified
mm (inch)
X.XXX ±0.1 (0.004)
X.XX ±0.25 (0.010)
X.X ±0.5 (0.02)
X. ±1.0 (0.04)
ANGULAR ± 2°

3.2

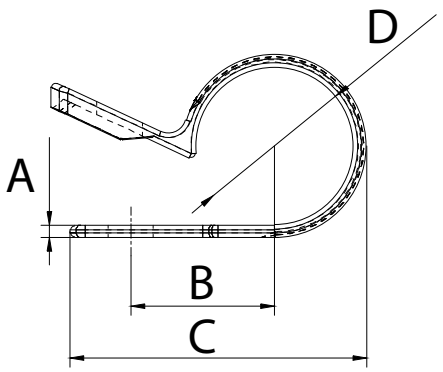

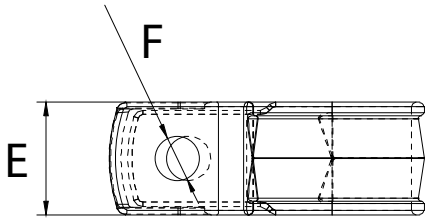

1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black:Polyamide 6.6 natural+ ~1% carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C - +85° C
6. Working temperature: -40° C - +85° C
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.

mm

Part Number	Size	A	B	C	D	E	F
CC-00.13	3.175	1.20	8	16.90	3.00	9.60	4.00
CC-00.19	4.7625	1.20	9.2	18.50	5.30	9.60	4.00
CC-00.25	6.35	1.20	10.4	20.00	6.80	10.10	4.00
CC-00.31	7.9375	1.20	11.2	22.60	8.40	10.00	4.00
CC-00.39	9.525	1.40	12.5	26.60	10.80	12.30	5.00
CC-00.50	12.7	1.40	14.8	30.30	13.80	12.20	5.00
CC-00.75	19.05	1.40	18	37.30	19.90	11.80	5.00

inches

Part Number	Size	A	B	C	D	E	F
CC-00.13	0.125	0.05	0.31	0.67	0.12	0.38	0.16
CC-00.19	0.1875	0.05	0.36	0.73	0.21	0.38	0.16
CC-00.25	0.25	0.05	0.41	0.79	0.27	0.40	0.16
CC-00.31	0.3125	0.05	0.44	0.89	0.33	0.39	0.16
CC-00.39	0.375	0.06	0.49	1.05	0.43	0.48	0.20
CC-00.50	0.5	0.06	0.58	1.19	0.54	0.48	0.20
CC-00.75	0.75	0.06	0.71	1.47	0.78	0.46	0.20

SECURE® CABLETIES

Rev	Qty	Rev number	Sign	Date
Authorization	Standard	Checked	Design	

PRODUCT DRAWING

CC-XX

Step			Qty	Weight	Ratio
			1		

UNIT:MM

Total page: 1 page: 1

Nylon Cable Clamp