


14 Inch UV Black Standard Cold Weather Arctic Flex Cable Ties - 100 Pack

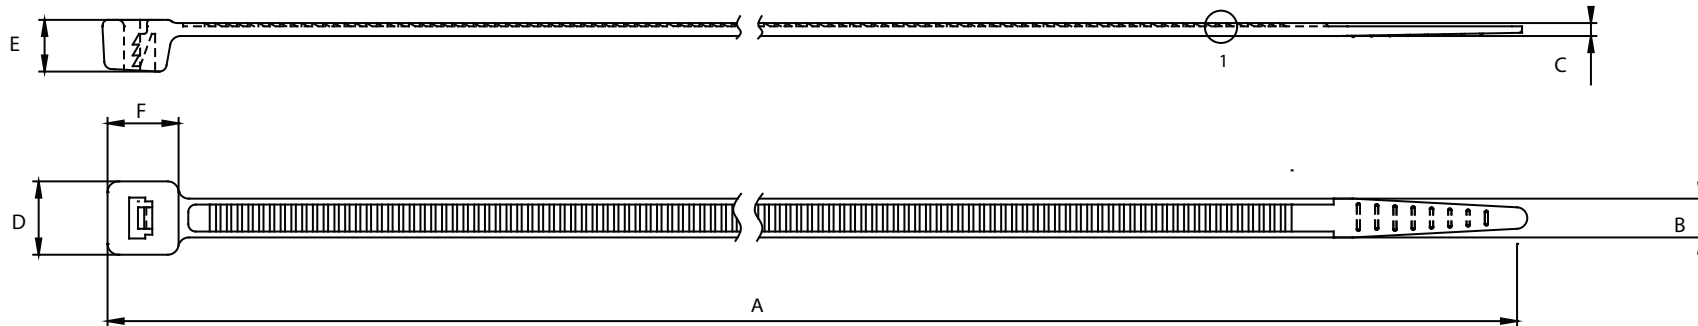

1. MATERIAL: Polyamide 6.6 High performance, Super tough, offers outstanding impact resistance over a wide temperature and humidity range (Dupont Zytel ST801)
2. Flammability of raw material : UL 94 - HB
3. Humidity absorption: 2.2% (23° C - 50% R.H.)
4. Minimum Installation temperature: -40° C
5. Working temperature: -40° C ÷ +85° C
6. Max sustainable temperature for short time: +110° C
7. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Carbon black addition gives a better UV resistance

Part	A	B	C	D	E	F	Bundle Diameter	Tensile Strength
HIT-08050-BK	200±3	3.6±0.2	1.15±0.1	6.40±0.3	4.70±0.3	6.00±0.3	3.5-52.5	180N(18kgs)
HIT-11050-BK	300±3	4.8±0.2	1.25±0.1	8.20±0.3	5.70±0.3	7.80±0.3	3.5-81.0	230N(23kgs)
HIT-14050-BK	370±5	4.8±0.2	1.25±0.1	8.20±0.3	5.70±0.3	7.80±0.3	3.5-103.5	230N(23kgs)
HIT-14120-BK	370±5	7.6±0.2	1.55±0.15	11.8±0.3	7.30±0.3	11.0±0.3	3.5-103.5	540N(55kgs)